

## DECKHOUSE PORTLIGHTS

This outward opening portlight has been designed to allow the frame of the portlight to be screwed directly on the vertical wall of the deckhouse. The external part of the porthole is manufactured in polycarbonate which gives the portlight, a uniform, aesthetic appearance. The outward opening portlight also allows a good circulation of air.



### Features.

The portlight has the qualities of robustness, impermeability; reliability and durability and has been manufactured using non-corrosive materials. The portlights are available in painted aluminium alloy. The standard is black and other colour available on request. The Plexiglass is grey.

overall dimensions	cut out size	clear glass	plexiglass thickness
500 x 160 mm	456 x 116mm	420 x 80mm	8mm

### Other characteristics:

Watertight

CE approved – Area III



Opening towards the outside

Four quick action handles with screws to adjust the aperture

Stainless Steel AISI 316 hinges mirror polished, or coloured

Adjusting screw for the clutch hinge

Easy to fit using M4 screws

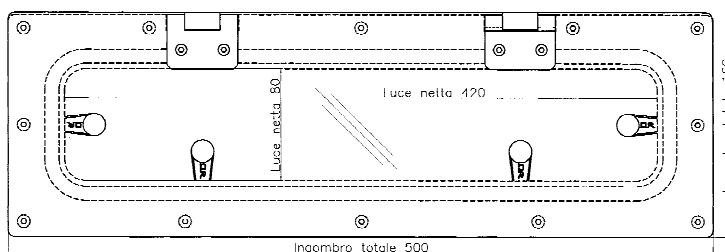

This unique characteristics of this portholes is that they can be customized to fit any boat.